



Throw Back to Basics

Engineer Roll

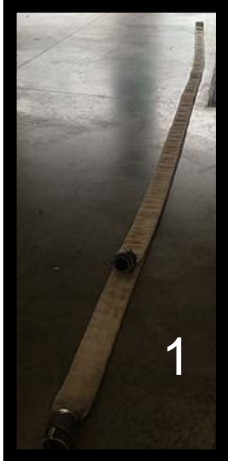

To create the Engineer roll, fold the 50' section of 3" in half pulling the male coupling back approximately 3' from the female, then begin rolling from the fold until the entire section is rolled tight

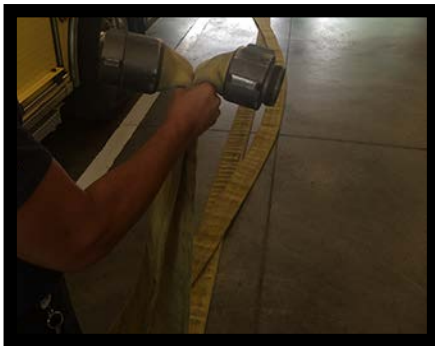

To deploy, grab both couplings and unroll, this places both couplings in the engineer's hands for placement into apparatus and quick hook up to hydrant, sprinkler system or for supply from another truck.